



AIR-OPERATED GREASE PUMPS Mod. 700

COMPRESSION RATIO = 100:1


DELIVERY = 1000 g/min



Art. 010-1035-000


Air-operated grease pump ratio=100:1 Mod. 700 For standard barrels 180-220 kg (shank length 950 mm)

Polyurethane seals



010-1035-000 7,590 0,016 1

Technical data		010-1032-000	010-1034-000	010-1035-000
Compression ratio		100:1	100:1	100:1
Max pressure feeding	bar	8	8	8
Air consumption medium	l/min	190	190	190
Air inlet connection	BSP	F 1/4" G	F 1/4" G	F 1/4" G
Grease outlet connection	BSP	M 1/4" G	M 1/4" G	M 1/4" G
Grease delivery capacity 6 bar	g/min	1000	1000	1000
Noise	dB	79	79	79
Shank diameter	mm	30	30	30
Shank length	mm	480	750	950
For drums with capacity of	kg	18-30	50-60	180-220

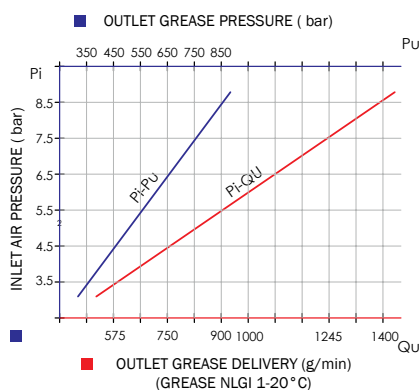

Those are suitable for central supply of plants where a major pressure at long and short distance is required. The operating pressure of the grease pumps hereby may vary between a minimum of 2.5 bar and a maximum of 8 bar. In order to optimize the efficiency and the life of our pneumatic pumps we recommend to use filtered and lubricated air.