


**Internal gear oil pump 10 l/min**


230 V-1~AC-50 Hz-0,75 kW



**Item number:** 23 337  
**EAN:** 4048358233370  
**Discount group:** D

**Technical data**

Discharge pressure up to (bar): 10  
 Connecting cable, length (m): 1,8  
 Connection suction side: G 3/4" male thread (both sides)  
 Connection discharge side: G 1/2" male  
 Hydraulic data  
 Pump design: gearwheel pump, selfpriming  
 Suction height (m): 3  
 Delivery rate under free discharge (l/min): 10  
 Flow media: oils up to SAE 90  
 Motor data  
 Voltage (V): 230  
 Frequency (Hz): 50  
 Power consumption (A): 4,5  
 Power (W): 750  
 Thermal protection: self resetting  
 Duty cycle (min): continuous operation – a real endurance runner  
 Torque (Nm): 2  
 Rotation speed (rpm): 1450  
 Safety class: IP66  
 Dimensions LxWxH (mm): 290 x 200 x 210  
 Weight (kg): 12,6

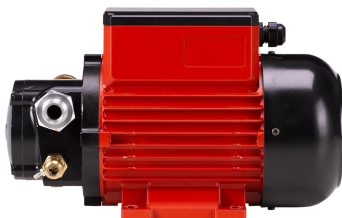


**Specification**

- On/Off switch
- Adjustable by-pass (pre-set at 7 bar)
- With venting valve
- Acc. to TRBF

**Special notes**

- Internal gear pump with corrugated filling part. This construction effects:
- Marginal inhomogeneous grade of volume flow rate
- Low noise level
- Compact construction
- The longer tooth engagement provides an improved seal effect and a better suction and discharge angle
- Optimal suction characteristics
- Pump for tank and wall mounting
- Pump is designed for use in conjunction with pipe lines up to 70 meters, depending on cross section of pipe line
- Recommended accessories for wall mounting:
- (19 512) and (19 522), (19 523), (19 523 001)

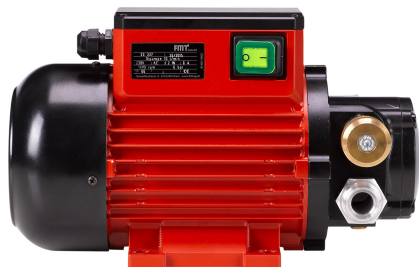


**Packaging**

Dimensions LxWxH (mm): 370 x 220 x 200  
 Weight (kg): 12,9

Packing unit:

1,0



23337  
 Mehrstagespumpe, 0,1hm  
 230 V-1-AC-50 Hz-0,5 kW

