

ZECA

TECHNICAL EXCELLENCE. SINCE 1929.

INDUSTRIAL CABLE REELS SERIES 4000

ART. 4315

Length (m)
15

Number of conductors
3 G

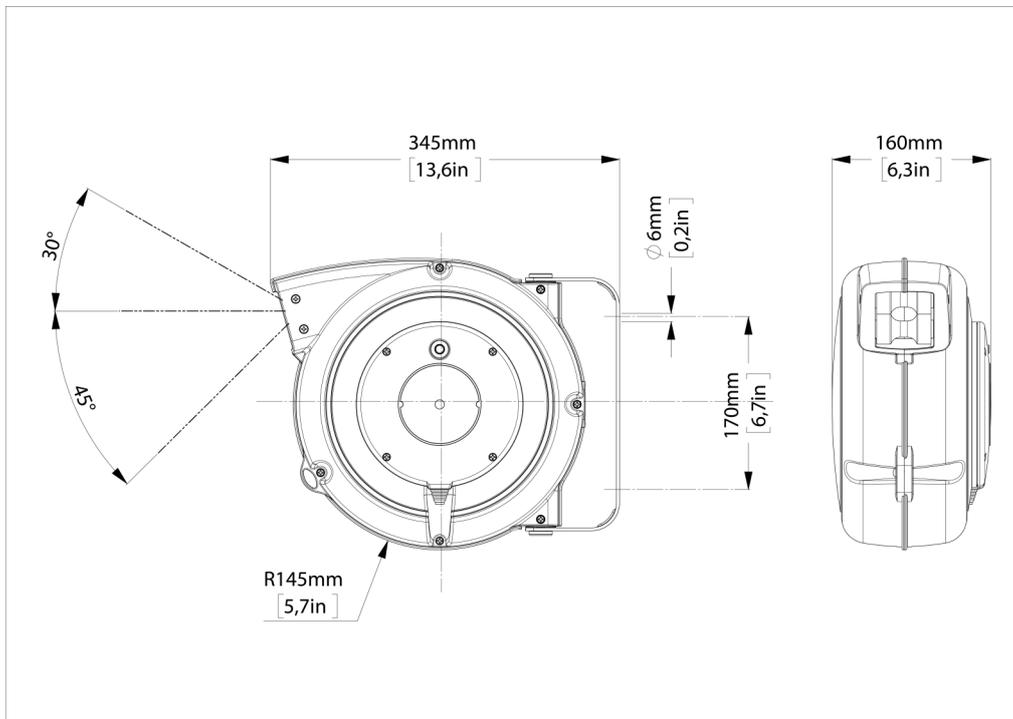
Cross-section (mm²)
1.5

Wound cable capacity (@20°C)
1,2 KW @ 230V



TECHNICAL DATA

Article	Lunghezza cavo (m)	Reel cable length (m)	Cut length (m)	Number of conductors	Cross-section (mm ²)	Wound cable capacity (@20°C)	Unwound cable capacity (@20°C)	Diametro cavo (mm)	Protettore termico	V max	Cable type
4315	15	14	1	3 G	1.5	1,2 KW @ 230V	1,8 KW @ 230V	7	SI	500	PVC

OVERALL DIMENSIONS**Technical features**

- Structural elements of the winder in shockproof plastic.
- Roller cable guide mouth.
- Cable stop device with rack that can be inserted every 50 cm. Easily eliminated if the cable is constantly in traction.
- Double ground contact.
- Collector insulation voltage 2.5 KV.
- Sliding contacts with collector ring and brushes.
- Degree of protection IP42.
- Supplied without piece on the power supply side.
- Models with both PVC and rubber cables are available.
- Ambient temperature of use: -5 ° / + 50 °.

OPTIONAL ACCESSORIES AND SPARE PARTS**ART. 949/804-4000**

for winder 4000

Optional device to make the hose reel fixed instead of swiveling.

Indispensable for ceiling application.

Special versions

ART.

Cable reel with Schuko plugs and sockets

